



**DEEP ROOF LIGHTING INC.**

**P.O. BOX 520191, FLUSHING, NY 11352**

**Tel: 718-243-9388, 718-243-1185, 718-243-1188, 718-637-6061**

**Fax: 718-243-9403, 718-321-1676**

**Web Site: [www.deeprooflighting.com](http://www.deeprooflighting.com)**

**Email: [deeproof@aol.com](mailto:deeproof@aol.com) [deeproof@verizon.net](mailto:deeproof@verizon.net) [deeproofgg@gmail.com](mailto:deeproofgg@gmail.com)**

## **LED T8 Tubes DLC and UL listed**

### **ITEM CODE :**

**LT8-D4CS-4B : 4000 K  
clear diffused**

**LT8-D4CS-5B : 5000 K  
clear diffused**

**LT8-D4FS-4B : 4000 K  
frosted**

**LT8-D4FS-5B : 5000 K  
frosted**



**100 - 277 VAC input.**


**Clear PC lenses diffuse lines etched, Or frost cover**

**Aluminum alloy lamp housing with streamline outlook,  
made by high thermal conductivity and precision lathe,  
could fully export the led quantity heat and reduce the light dissipation effectively.**

**Electric circuit with PFC construction could effectively increase power factor more than 0.9,  
and greatly decrease the harmonic current impulse, helpful for power saving.**

**PC cover for photodiffusion , 90% high light transmittance,  
make sure that the light spread is softly and balanced..**

**Circuit protection : Over current protection , Over power protection , Short-circuit protection**


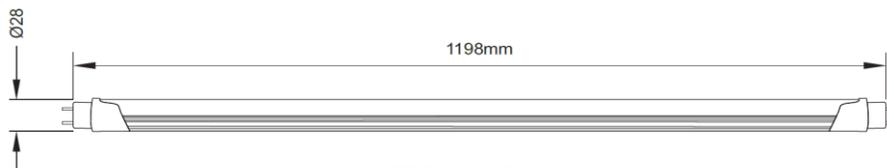



**T8-1.2m**

- 1. Power24W, replaces T8/T10 CFL40W;**
- 2. More than 50000hrs life time, remains 70%  
brightness after 50000hrs.**
- 3. meets standard LM80**
- 4. Approved UL、DLC、CE、FCC、RoHS Certification**
- 5. Excellent for Hi-Bay Industrial Lighting**

Power	24W
Input voltage	AC 100V~277V
Frequency	50/60KHz
CCT (Typ.)	4000K
Flux (Typ.)	2360LM
Efficacy (Typ.)	99lm/w
CRI	>80
Power factor	≥0.95
Lifespan	>50000h
Beam angle	180
Operating Temp.	-25°C ~ +40°C
Warranty	5years

**Wiring -**

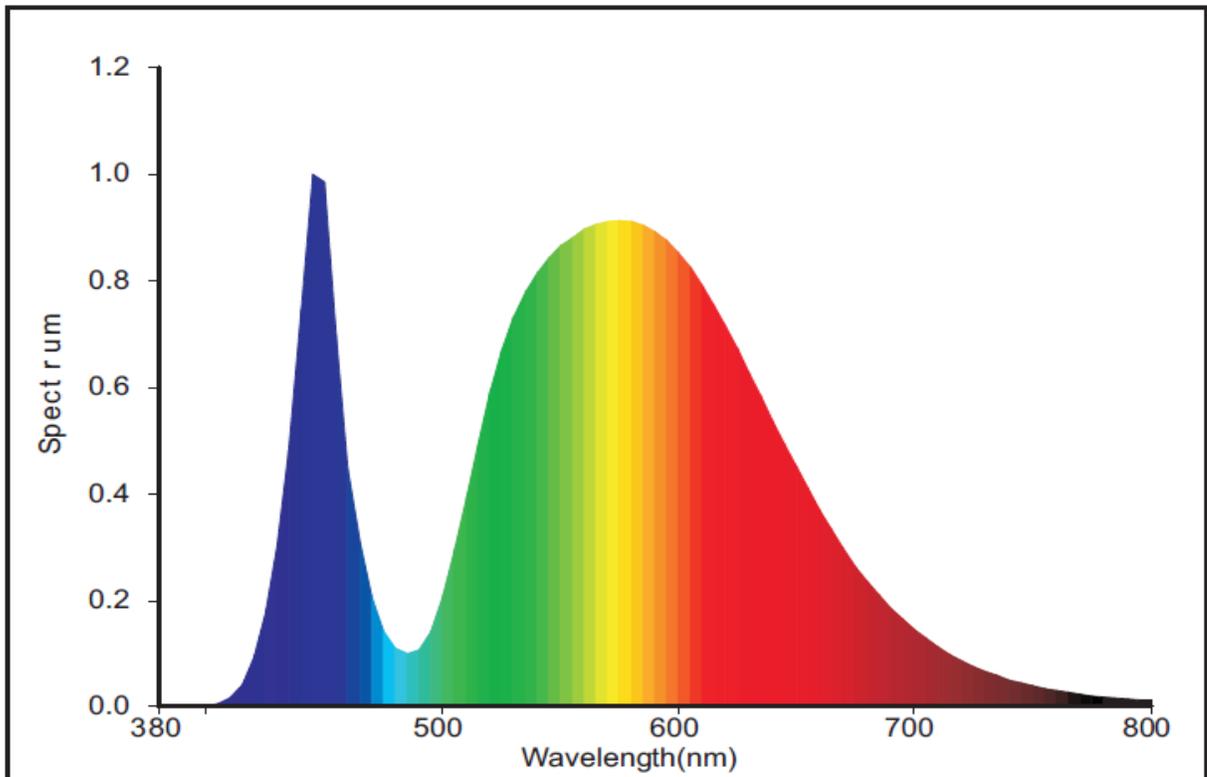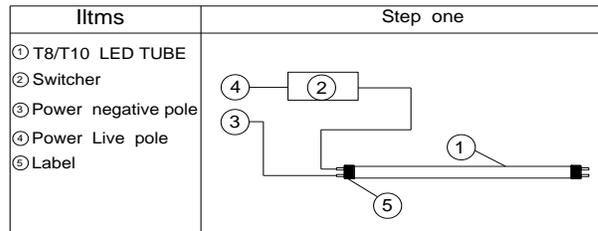

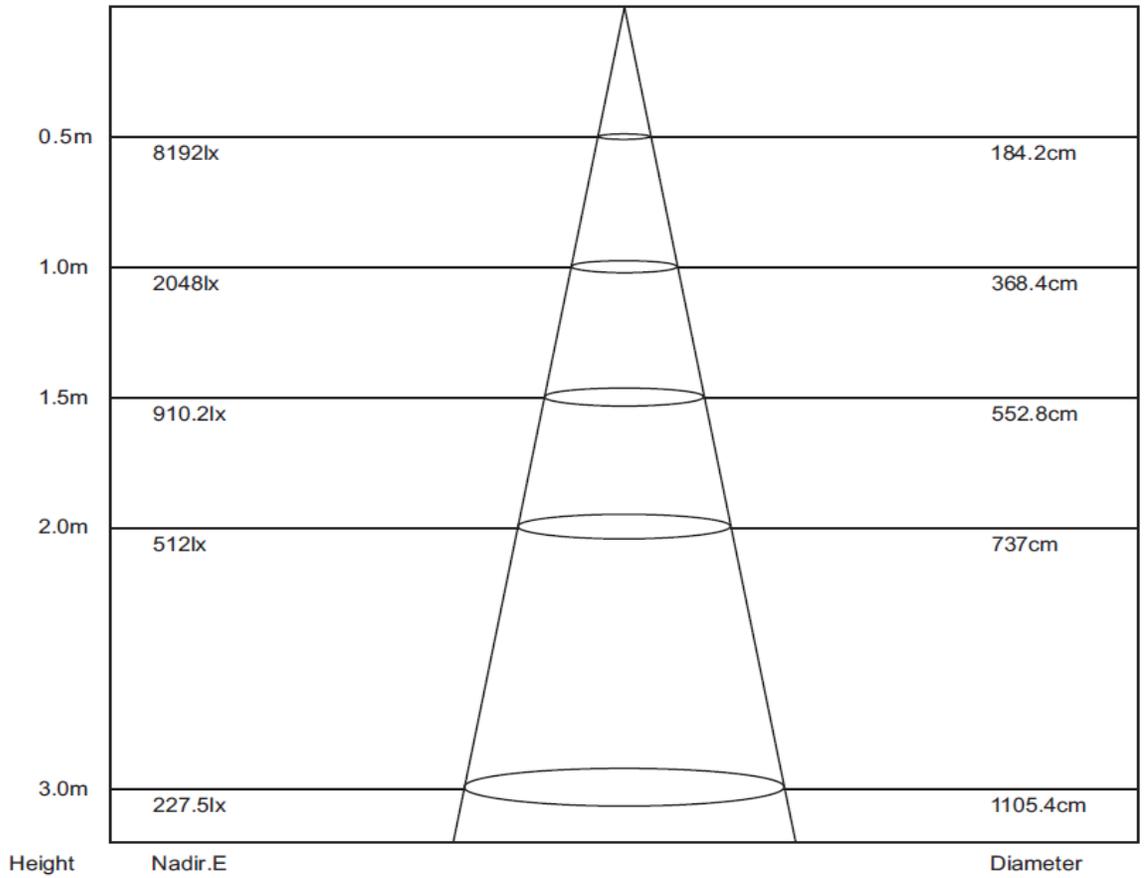

## Lifespan:

