





LED Slim Mini Panel Down Lights 4" - 6" ETL G Series



- Energy Star
- 10 mm slim mini panel
- 4" 9 watts, 750 lumen
- 4" 12 watts, 850 - 950 lumen
- 6" 18 watts, up to 1500 lumen
- Colors: White, Black, Satin Nickel
- 4" adjustable, 360° rotation
- Embossed pocket cold forged back plate
- Color Temp: 3000K, 4000K, 5000K
- Triac dimmable
- Rated for damp location
- 120 VAC
- Beam Angle: 110°



4 inch side-lit down light

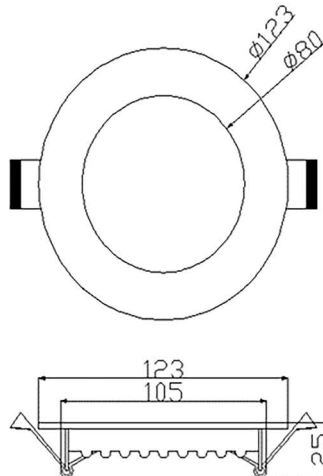
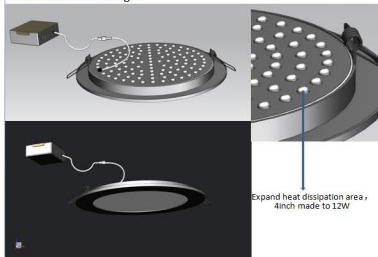






Power	Input	Lumens	Efficacy	CCT	CRI	Power Factor	LENS	Dimmable	Materials	IP Rate
12W	120V AC	840	70	2700K	80 or 90RA	>0.95	Milky	Y	Pure Aluminum + PC	Damp
12W	120V AC	900	75	3000K	80 or 90RA	>0.95	Milky	Y	Dimm	Beam Angel
12W	120V AC	960	80	4000K	80 or 90RA	>0.95	Milky	Y	Triac Dimming	110°
12W	120V AC	996	83	6000K	80 or 90RA	>0.95	Milky	Y		



- 4" / 9 watts / 750 lumen
- Aluminum & PC housing
- 100-120 VAC
- 3000K, 4000K, 5000K
- Triac dimming
- Rated for damp location
- Beam angle 110°
- Energy Star




Power	Input	Lumens	Efficacy	CCT	CRI	Power Factor	LENS	Dimmable	Materials	IP Rate
18W	120V AC	1260	70	2700K	80 or 90RA	>0.95	Milky	Y	Pure Aluminum + PC	Damp
18W	120V AC	1350	75	3000K	80 or 90RA	>0.95	Milky	Y	Dimm	Beam Angel
18W	120V AC	1440	80	4000K	80 or 90RA	>0.95	Milky	Y	Triac Dimming	110°
18W	120V AC	1494	83	6000K	80 or 90RA	>0.95	Milky	Y		

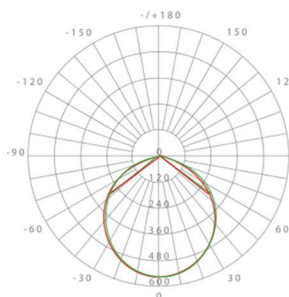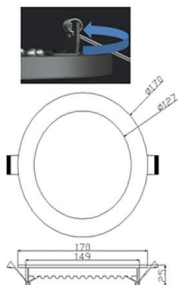

EASY INSTALLATION


1.

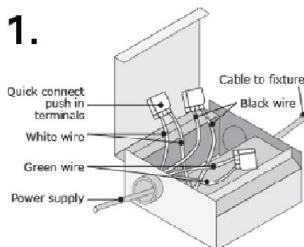

2.



3.




4" Gimble Ring - Heavy duty stand alone adjustable




Output: 1200-1300 lumens

Product Dimensions

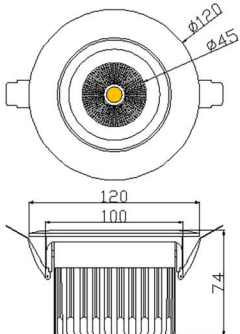


Photometric Data

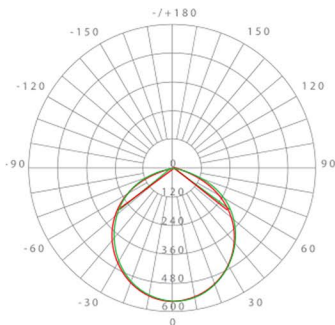

15W	120V AC	1200	90	2700K	80 or 90RA	>0.95	Milky	Y	Materials	IP Rate
15W	120V AC	1200	90	3000K	80 or 90RA	>0.95	Milky	Y	Pure Aluminum + PC	Damp
15W	120V AC	1300	95	4000K	80 or 90RA	>0.95	Milky	Y	Dimm	Beam Angel
15W	120V AC	1300	95	6000K	80 or 90RA	>0.95	Milky	Y	Triac Dimming	110°

Installation

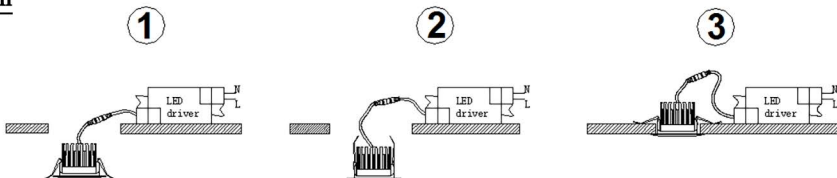




Square Mini Panel on 4" and 6"

LED 4" 10W Square Slim panel

Mod.No.	Power	Input	Lumens	Efficacy	CCT	CRI	Power Factor	LENS	Dimmable
LSMQ-G410-D30(W/B/SN)	10W	120V AC	750	75	3000K	80 or 90RA	>0.90	Milky	Y
LSMQ-G410-D40(W/B/SN)	10W	120V AC	800	80	4000K	80 or 90RA	>0.90	Milky	Y
LSMQ-G410-D50(W/B/SN)	10W	120V AC	850	83	5000K	80 or 90RA	>0.90	Milky	Y


Operating Frequency	Size	Dimmable	Beam Angle	Base	Finish/Color
60HZ	4"120*150mm	Triac Dimming	110°		White / Nickel Satin / Black
IP Rating	THD (%)	LED Chip	Life Time	Warranty	Materials
Damp	<17.22%	Epistar	50000hrs	5 years	Pure Aluminum + PC



LED 6" 12W Square Slim panel

Mod.No.	Power	Input	Lumens	Efficacy	CCT	CRI	Power Factor	LENS	Dimmable
LSMQ-G615-D30(W/B/SN)	15W	120V AC	1250	80	3000K	80 or 90RA	>0.90	Milky	Y
LSMQ-G615-D40(W/B/SN)	15W	120V AC	1250	85	4000K	80 or 90RA	>0.90	Milky	Y
LSMQ-G615-D50(W/B/SN)	15W	120V AC	1250	85	5000K	80 or 90RA	>0.90	Milky	Y

Operating Frequency	Size	Dimmable	Beam Angle	Base	Finish/Color
60HZ	6"173*150mm	Triac Dimming	110°		White / Nickel Satin / Black
IP Rating	THD (%)	LED Chip	Life Time	Warranty	Materials
Damp	<17.22%	Epistar	50000hrs	5 years	Pure Aluminum + PC





Item Codes

LSMR-G409-D30W-K

Round 4" slim mini panel, 9W, dimmable, 3000K, White

LSMR-G409-D40W-K

Round 4" slim mini panel, 9W, dimmable, 4000K, White

LSMR-G409-D50W-K

Round 4" slim mini panel, 9W, dimmable, 5000K, White

LSMR-G412-D30(W/B/SN)

Round 4" slim mini panel, 12W, dimmable, 3000K, White/Black/Satin nickel

LSMR-G412-D40(W/B/SN)

Round 4" slim mini panel, 12W, dimmable, 4000K, White/Black/Satin nickel

LSMR-G412-D50(W/B/SN)

Round 4" slim mini panel, 12W, dimmable, 5000K, White/Black/Satin nickel

LSMR-G618-D30(W/B/SN)

Round 6" slim mini panel, 18W, dimmable, 3000K, White/Black/Satin nickel

LSMR-G618-D40(W/B/SN)

Round 6" slim mini panel, 18W, dimmable, 4000K, White/Black/Satin nickel

LSMR-G618-D50(W/B/SN)

Round 6" slim mini panel, 18W, dimmable, 5000K, White/Black/Satin nickel

LSMQ-G410-D30(W/B/SN)

Square 4" slim mini panel, 10W, dimmable, 3000K, White/Black/Satin nickel

LSMQ-G410-D40(W/B/SN)

Square 4" slim mini panel, 10W, dimmable, 4000K, White/Black/Satin nickel

LSMQ-G410-D50(W/B/SN)

Square 4" slim mini panel, 10W, dimmable, 5000K, White/Black/Satin nickel

LSMQ-G615-D30(W/B/SN)

Square 6" slim mini panel, 15W, dimmable, 3000K, White/Black/Satin nickel

LSMQ-G615-D40(W/B/SN)

Square 6" slim mini panel, 15W, dimmable, 4000K, White/Black/Satin nickel

LSMQ-G615-D50(W/B/SN)

Square 6" slim mini panel, 15W, dimmable, 5000K, White/Black/Satin nickel

LSMG-G415-D30W

Gimble ring 4" mini panel, 15W, dimmable, 3000K, White

LSMG-G415-D40W

Gimble ring 4" mini panel, 15W, dimmable, 4000K, White

LSMG-G415-D50W

Gimble ring 4" mini panel, 15W, dimmable, 5000K, White