



DEEP ROOF LIGHTING INC.
55 Sea Cliff Avenue, Glen Cove, NY 11542
P.O. Box 520191, Flushing, NY 11352
Tel: 516-676-9100, 9101, 9103, 9105, 9106
Fax: 516-676-9109


Web Site: www.deeprooflighting.com
Email: deeproof@aol.com jay@deeprooflighting.com

SLIM MINI PANEL 5/3 CCT 4" and 6"

UL ES

• 2700, 3000, 3500, 4000, 5000 K

Step Baffle Facade

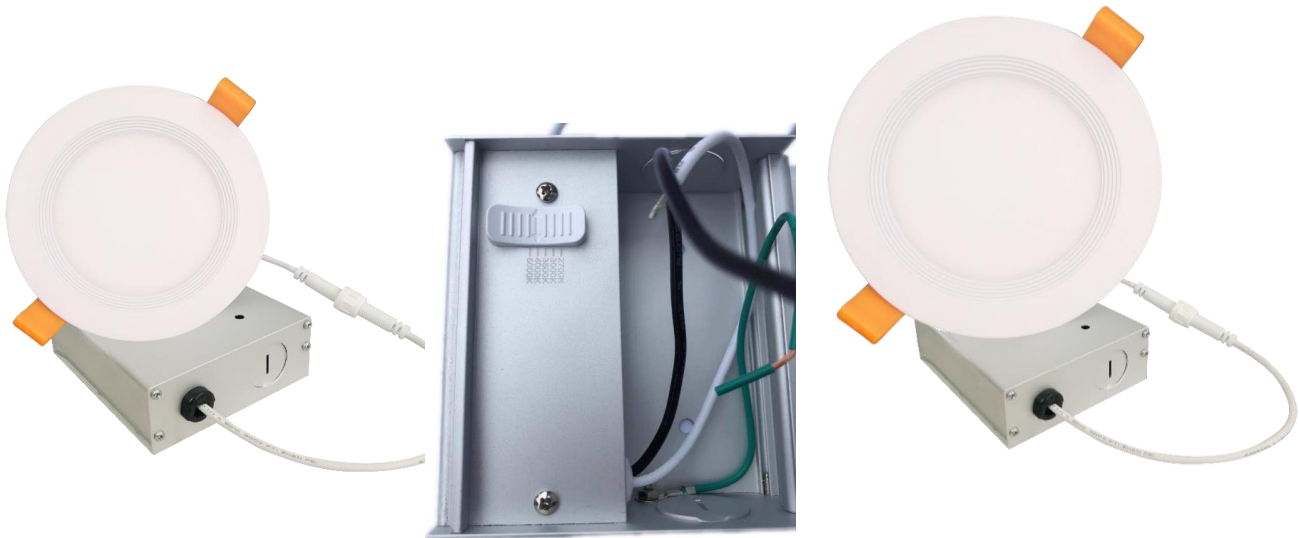

Material of junction box	Size of round panel	Size of junction box	Material of Panel	LENS	Working environment	UL/CUL	ES
Aluminum	Φ123*28mm	85*32.5*98mm	Aluminum+PC	misty-white	Damp location	YES	YES
Aluminum	Φ173*28mm	85*32.5*98mm	Aluminum+PC	misty-white	Damp location	YES	YES

Item No.	Watt	Volt	Lumens	Dim	Triac dimming	5CCT	CRI	PF	Base
4" Round	10w	120V	800Lm	Yes	YES	27K-30K-35K-40K-50K	>80	>90	with Junction Box
6" Round	15w	120V	1300LM	Yes	YES	27K-30K-35K-40K-50K	>80	>90	with Junction Box

ITEM CODES

LSMR-H410-D5CC-(W/B/SN)
LSMR-H615-D5CC-(W/B/SN)
LSMQ-L410-D345-(W/B/SN)
LSMQ-L615-D345-(W/B/SN)
LSMQ-H410-D5CC-(W/B/SN)
LSMQ-H615-D5CC-(W/B/SN)

4" Round, 10W, 800 Lumen, 5 color, Dimmable, White/Black/Satin finish
6" Round, 15W, 1300 Lumen, 5 color, Dimmable, White/Black/Satin finish
4" Sq/Rd 10W, 800 Lumen, 3 color, Dimmable, White/Black/Satin finish
6" Sq/Rd 15W, 1300 Lumen, 3 color, Dimmable, White/Black/Satin finish
4" Sq/Sq 10W, 800 Lumen, 5 color, Dimmable, White/Black/Satin finish
6" Sq/Sq 15W, 1300 Lumen, 5 color, Dimmable, White/Black/Satin finish

L-series - 4" Square front, Round back LSMQ, 3/4/5 K, 10W 800 lumen, dimmable

LSMQ-L410-D345-(W/B/SN)

L-series - 6" Square front, Round back LSMQ, 3/4/5 K, 15W 1300 lumen, dimmable

LSMQ-L615-D345-(W/B/SN)

***** Flat Facade *****



H-series - 4" Square front, Square back LSMQ,

LSMQ-H410-D5CC-(W/B/SN) 2700/3000/3500/4000/5000 K, 10W, 800 Lumen, dimmable

H-series - 6" Square front, Square back LSMQ

LSMQ-H615-D5CC-(W/B/SN) 2700/3000/3500/4000/5000 K, 15W, 1300 Lumen, dimmable

***** Step façade *****




Material of junction box	Size of Square panel	Size of junction box	Material of Panel	LENS	Working environment	UL/CUL	ES
Aluminum	120*120*28mm	85*32.5*98mm	Aluminum+PC	misty-white	Damp location	YES	YES
Aluminum	171*171*28mm	85*32.5*98mm	Aluminum+PC	misty-white	Damp location	YES	YES


Item No.	Watt	Volt	Lumens	Dim	Triac dimming	5CCT	CRI	PF	Base
4" Square	10w	120V	800Lm	Yes	YES	27K-30K-35K-40K-50K	>80	>90	with Junction Box
6" Square	15w	120V	1300LM	Yes	YES	27K-30K-35K-40K-50K	>80	>90	with Junction Box

• Cut Sheet – ROUND and SQUARE


4" Slim Panel:

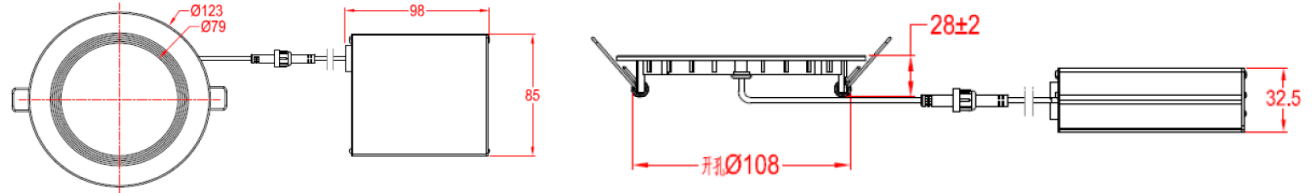


6" Slim Panel:

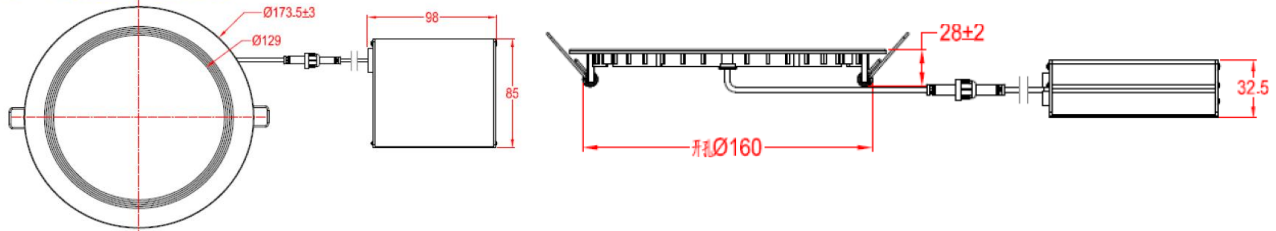

4" Slim Panel:

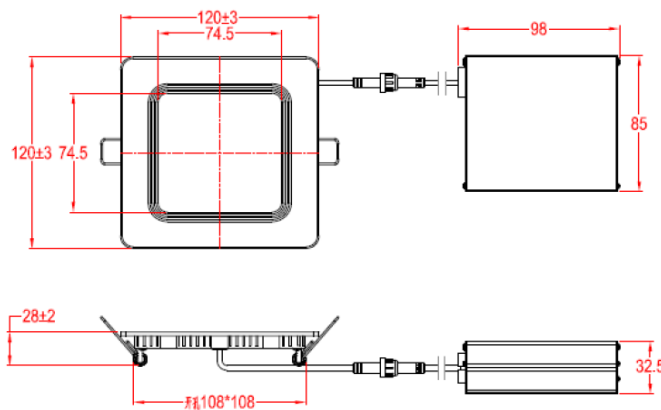

6" Slim Panel:

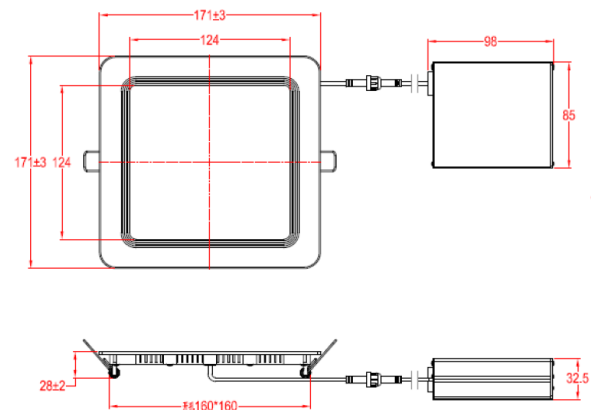

Installation Guide

